


5590 Urelastfedern

DIN 9835, Härte: 90 ±5 Shore A

Urelast springs

DIN 9835, Hardness: 90 ±5 Shore A

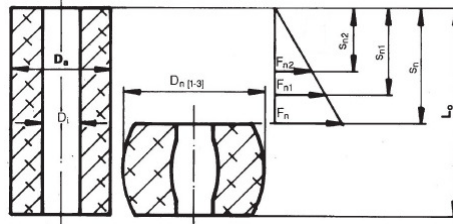

Sn2 = 10% Verformung von Lo

Sn2 = 10% deformation of Lo

Sn1 = 20% Verformung von Lo

Sn1 = 20% deformation of Lo

Sn = 30% Verformung von Lo

Sn = 30% deformation of Lo

Bestellbeispiel / Order example: Da=16mm; Lo=25mm



Bestell-Nummer / Order number: **5590-016x025**

F _{n2} (daN)	S _{n2} (mm)	D _{n2} (mm)	F _{n1} (daN)	S _{n1} (mm)	D _{n1} (mm)	F _n (daN)	S _n (mm)	D _n (mm)	D _i mm	D _a mm	L _o mm	Best.Nr.: Order No.
41,5	1,2	17,4	82,0	2,4	19,0	149,0	3,6	20,6	6,5	16	12	5590-016x012
47,5	1,6		93,5	3,2		175,0	4,8				16	5590-016x016
47,5	2,0		91,0	4,0		182,0	6,0				20	5590-016x020
46,5	2,5		91,5	5,0		196,0	7,5				25	5590-016x025
83,0	1,6	21,8	149,0	3,2	23,8	280,0	4,8	25,8	8,5	20	16	5590-020x016
79,0	2,0		146,0	4,0		300,0	6,0				20	5590-020x020
79,0	2,5		149,0	5,0		296,0	7,5				25	5590-020x025
78,0	3,2		151,0	6,4		289,0	9,6				32	5590-020x032
139,0	2,0	27,3	251,0	4,0	29,8	521,0	6,0	32,3	10,5	25	20	5590-025x020
133,0	2,5		255,0	5,0		543,0	7,5				25	5590-025x025
128,0	3,2		249,0	6,4		558,0	9,6				32	5590-025x032
129,0	4,0		256,0	8,0		517,0	12,0				40	5590-025x040
180,0	3,2	34,9	338,0	6,4	38,1	632,0	9,6	41,3	13,5	32	32	5590-032x032
172,0	4,0		317,0	8,0		567,0	12,0				40	5590-032x040
187,0	5,0		353,0	10,0		672,0	15,0				50	5590-032x050
192,0	6,3		360,0	12,6		670,0	18,9				63	5590-032x063
300,0	3,2	43,6	572,0	6,4	47,6	1050,0	9,6	51,6		40	32	5590-040x032
334,0	4,0		681,0	8,0		1420,0	12,0				40	5590-040x040
325,0	5,0		625,0	10,0		1220,0	15,0				50	5590-040x050
330,0	6,3		620,0	12,6		1190,0	18,9				63	5590-040x063
350,0	8,0		650,0	16,0		1235,0	24,0				80	5590-040x080
515,0	3,2	54,5	980,0	6,4	59,5	1835,0	9,6	64,5	17,0	50	32	5590-050x032
490,0	4,0		930,0	8,0		1780,0	12,0				40	5590-050x040
480,0	5,0		895,0	10,0		1800,0	15,0				50	5590-050x050
515,0	6,3		960,0	12,6		1860,0	18,9				63	5590-050x063
490,0	8,0		930,0	16,0		1740,0	24,0				80	5590-050x080
725,0	3,2	68,7	1410,0	6,4	75,0	2605,0	9,6	81,3		63	32	5590-063x032
760,0	4,0		1460,0	8,0		2620,0	12,0				40	5590-063x040
800,0	5,0		1550,0	10,0		2900,0	15,0				50	5590-063x050
840,0	6,3		1590,0	12,6		2870,0	18,9				63	5590-063x063
840,0	8,0		1620,0	16,0		3240,0	24,0				80	5590-063x080
810,0	10,0		1550,0	20,0		2970,0	30,0				100	5590-063x100
1350,0	3,2	87,2	2710,0	6,4	95,2	5000,0	9,6	103,2	21,0	80	32	5590-080x032
1500,0	5,0		2910,0	10,0		5700,0	15,0				50	5590-080x050
1420,0	6,3		2690,0	12,6		5240,0	18,9				63	5590-080x063
1500,0	8,0		2820,0	16,0		5600,0	24,0				80	5590-080x080
1440,0	10,0		2740,0	20,0		5600,0	30,0				100	5590-080x050
2320,0	6,3	109,0	4530,0	12,6	119,0	9550,0	18,9	129,0		100	63	5590-080x063
2240,0	10,0		4250,0	20,0		8930,0	30,0				100	5590-080x080