


**K7055 Schnellkupplung mit Außengewinde,  
kuze Ausführung, mit Ventil**

**MSTBtec<sup>2</sup>**

**Quick release coupling with outside thread,  
short design, with valve**

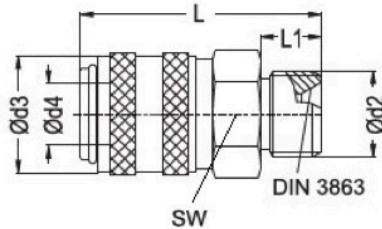

P= Stück / Normpackung // Pieces/ standard pack

Material: **Standardversion / Standard version**

Kupplungsgrundkörper: Messing / Coupler Body: Brass  
Hülse: Messing / Sleeve: Brass  
Ventil: Messing / Valve: Brass  
Feder: Edelstahl / Spring: Stainless Steel  
Sprengling: Edelstahl / Locking O-Ring: Stainless Steel  
Kugeln: Edelstahl V-/ Balls: Stainless Steel

Betriebsdruck / Working pressure: p (bar)



Optionen / Options:

Verchromt / Chrome plated – Index: -Cr

Vernickelt / Nickel plated – Index: -Ni

Edelstahl / Stainless Steel – Index: -S

Bei optionaler Bestellung bitte Kennbuchstaben hinzufügen:  
For optional orders please add the options index end of the order no.:  
( Beispiel/example: K7055- d2-d4-V-Cr)

p	d3	L	L1	SW	P	d2	d4	 Bestellnummer Order Number Mit Ventil / with Valve	 Bestellnummer Order Number ohne Ventil / without Valve
0 - 10	18	38	9	17	10	BSP 1/4"	9	K7055-1/4-09-V	K7055-1/4-09
0 - 15	23			21		BSP 3/4"	13	K7055-3/4-13-V	K7055-3/4-13

**Dauertemperatur / Long-term service temperature**

K7055	Standard	
	Medium	Max. C°
	Öl / Oil	160
	Wasser / Water	120

K7056	Hochtemperatur High temperature	
	Medium	Max. C°
	Öl / Oil	200
	Wasser / Water	160

K7057	Höchsttemperatur High of temperature	
	Medium	Max. C°
	Öl / Oil	300
	Wasser / Water	250

**MSTBtec<sup>2</sup>**

Jägerstrasse 30  
58091 Hagen

Tel.: +49 (0) 2331 / 186388-0  
Fax: +49 (0) 2331 / 186388-9

info@mstbtec.de  
www.mstbtec.de