


## 5047, 5049 Systemfedern

für extra extra starke Belastung, Kennfarbe schwarz  
**System springs**  
 for extra extra heavy loads, colour black

# MSTBtec<sup>2</sup>

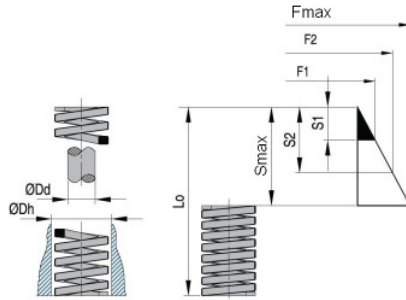

Lo - unbelastete Länge / unloaded length  
 ⚠ - Smax Federweg / max. travel stroke

**Wichtig / important**

Smax **darf Niemals** überschritten werden!

Smax **should never** be passed

Bestellbeispiel / Order example: Dh=16mm; Lo=75mm



Bestell-Nummer / Order number: **5047-16x075**

Federrate Spring coefficient N/mm	Fmax N	⚠ Smax mm	ØDd	ØDh	Lo	Best.Nr.: Order No:
1650	3.500	2,1	8	16	20	5047-16x020
920		3,8			35	5047-16x035
580		6,0			50	5047-16x050
410		8,5			75	5047-16x075
280		12,5			100	5047-16x100
2270	5.000	2,2	10	20	25	5047-20x025
116		4,3			40	5047-20x040
830		6,0			50	5047-20x050
500		10,0			75	5047-20x075
360		14,0			100	5047-20x100
4550	10.000	2,2	12,5	25	30	5047-25x030
2000		5,0			50	5047-25x050
1250		8,0			75	5047-25x075
830		12,0			100	5047-25x100
710		14,0			125	5047-25x125
5360	15.000	2,8	16	32	35	5047-30x035
3000		5,0			50	5047-30x050
1670		9,0			75	5047-30x075
1200		12,5			100	5047-30x100
940		16,0			125	5047-30x125
810		18,5			150	5047-30x150
5710	20.000	3,5	20	40	40	5047-40x040
4000		5,0			50	5047-40x050
2220		9,0			75	5047-40x075
1540		13,0			100	5047-40x100
1050		19,0			150	5047-40x150
740		27,0			200	5047-40x200

Bestellbeispiel / Order example: Dh=32mm; Lo=75mm



Bestell-Nummer / Order number: **5049-32x075**

Federrate Spring coefficient N/mm	Fmax N	⚠ Smax mm	ØDd	ØDh	Lo	Best.Nr.: Order No:
6280	18.500	3,0	8	32	35	5049-32x035
3580		5,2			50	5049-32x050
2080		9,0			75	5049-32x075
1480	25.000	12,5	10	40	100	5049-32x100
6880		3,6			40	5049-40x040
4830		5,2			50	5049-40x050
2720		9,2			75	5049-40x075
1900		13,2			100	5049-40x100