


K4200 Flachauswerfer,
mit zylindrischem Kopf, Typ FK

Flat ejector pin,
with cylindrical head, type FK

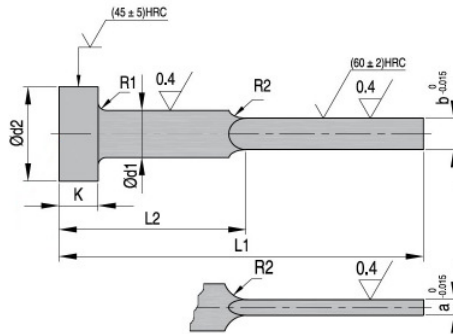

Material: WS / gehärtet

Material: hot-working steel / hardened

Max. Temp: 250 °C

DIN 1530 / ISO 8693

Sonderabmessungen auf Anfrage
Special sizes on request

P= Stück / Normpackung // Pieces/ standard pack

Bestellbeispiel / Order example: a=0,8mm; b=3,8mm; L1=63mm; L2=32mm

► Bestell-Nummer / Order number: **K4200-0,8-3,8x063-032**

a -0,015	b -0,015	L1 +2										P	d2 0/-0,2	d1 h11	K 0/-0,05	R1 0/+0,2	R2	
		60	80	100	125	160	200	250	315	400								
		L2 -1/-2																
		30	40	50	60	80	100	125	160	200								
0,8	3,5											10	8	4,0	3	0,3	10	
0,8	3,8										4,2							
1,0	3,5										4,0							
1,2																		
0,8	3,8													10	5,0			
1,0																		
1,2																		
1,0	4,5													10	5,0			
1,2																		
1,5																		
1,2																		
1,0	5,5													12	6,0	5	0,5	
1,2																		
1,5																		
2,0																		
1,2	7,5													14	8,0			
1,5																		
2,0																		
1,5	9,5													16	10,0			
2,0																		
2,0																		
2,0	11,5												18	12,0	7	0,8		
2,5																		
2,0	15,5												22	16,0				
2,5																		