


K4210 Flachauswerfer,
mit zylindrischem Kopf, Typ FW

Flat ejector pin,
with cylindrical head, type FW

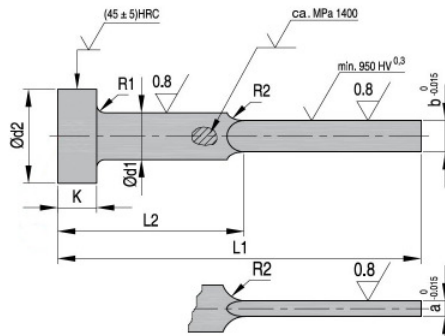

Material: WAS / nitriert

Material: hot-working steel / nitrided

Max. Temp: 500-550 °C

DIN 1530 / ISO 8693

Sonderabmessungen auf Anfrage
Special sizes on request

P= Stück / Normpackung // Pieces/ standard pack

Bestellbeispiel / Order example: a=0,8mm; b=3,8mm; L1=63mm; L2=32mm

► Bestell-Nummer / Order number: **K4210-0,8-3,8x063-032**

a -0,015	b -0,015	L1 +2										P	d2 0/-0,2	d1 h11	K 0/-0,05	R1 0/+0,2	R2
		60	80	100	125	160	200	250	315	400							
		L2 -1/-2															
		30	40	50	60	80	100	125	160	200							
0,8	3,5											10	8,0	4,0	3	0,3	10
	3,8										4,2						
1,0	3,5										4,0						
1,2																	
1,0	3,8										4,2						
1,2																	
1,0	4,5										10,0		5,0				
1,2																	
1,5																	
1,6																	
1,8																	
1,0	5,5										12,0	6,0	5	0,5			
1,2																	
1,5																	
1,6																	
1,8																	
2,0																	
1,2	7,5										14,0	8,0					
1,5																	
1,6																	
1,8																	
2,0																	
1,5	9,5										16,0	10,0					
1,8																	
2,0																	
2,0	11,5										18,0	12,0	7	0,8			
2,5																	
2,0	12,0										22,0	16,0					
2,5																	
2,0	15,0																
2,5																	
2,0	15,5																
2,5																	