




K6035 Federndes Druckstück
geschlzt

Spring plunger
with notch for screwdriver

Material: 1.0715

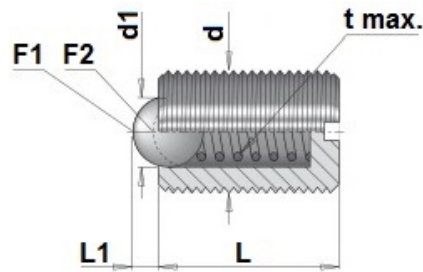


 = Verpackungseinheit / packing unit

| Nr. / No. | d | d1 | L | L1 | F1 | F2 | t max. |  |
|------------|-----|------|----|-----|-----|-----|--------|---|
| K6035 - 3 | M 3 | 1,5 | 7 | 0,5 | 1,5 | 3 | 350°C | 10 |
| K6035 - 4 | M 4 | 2,5 | 9 | 0,8 | 6 | 12 | | |
| K6035 - 5 | M 5 | 3,0 | 12 | 0,9 | 7 | 13 | | |
| K6035 - 6 | M 6 | 3,5 | 14 | 1,0 | 9 | 15 | | |
| K6035 - 8 | M 8 | 5,0 | 16 | 1,5 | 20 | 35 | | |
| K6035 - 10 | M10 | 6,0 | 19 | 2,0 | 25 | 45 | | |
| K6035 - 12 | M12 | 8,0 | 22 | 2,5 | 35 | 60 | | |
| K6035 - 16 | M16 | 10,0 | 24 | 3,5 | 65 | 110 | | |
| K6035 - 20 | M20 | 12,0 | 30 | 4,5 | 80 | 160 | | |


K6040 Federndes Druckstück
mit Innensechskant

Spring plunger
with hexagon socket

Material: 1.0715

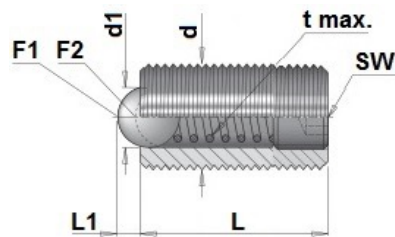

 = Verpackungseinheit / packing unit

| Nr. / No. | d | d1 | L | L1 | F1 | F2 | SW | t max. |  |
|------------|-----|------|----|-----|----|-----|----|--------|---|
| K6040 - 6 | M 6 | 3,5 | 15 | 1,0 | 9 | 13 | 3 | 350°C | 10 |
| K6040 - 8 | M 8 | 4,5 | 18 | 1,5 | 15 | 30 | 4 | | |
| K6040 - 10 | M10 | 6,0 | 23 | 2,0 | 20 | 35 | 5 | | |
| K6040 - 12 | M12 | 8,0 | 26 | 2,5 | 30 | 55 | 6 | | |
| K6040 - 16 | M16 | 10,0 | 33 | 3,5 | 65 | 125 | 8 | | |
| K6040 - 20 | M20 | 12,0 | 43 | 4,5 | 80 | 160 | 10 | | |
| K6040 - 24 | M24 | 15,0 | 48 | 5,5 | 90 | 180 | 12 | | |